

JS SERIES
Side-Mount Sand Filter



Simple Maintenance,
Superior Clarity





Enjoy crystal clear water and superior clarity with Jandy Pro Series Side-Mount Sand Filters

Sand filters provide a clean, clear body of water with features designed for simple and effortless maintenance.

» Side Mount Sand Filters

- JS Side Mount Sand Filters are available in two sizes. The JS60 has a 24" tank diameter and the JS100 has a 30" tank diameter
- Versa Plumb® ready for quick connection to other Jandy Pro Series and Zodiac equipment
- Side mount allows for easy installation or replacement of existing filter
- Clean/dirty indicator on pressure gauge allows you to know exactly when to clean the filter for optimal filtration and water savings
- Large 2" drain port
- Three backwash valves available
- Extra deep sand bed and dual diffusers for superior filtration
- Heavy-duty, durable composite body made of corrosion and UV resistant materials



Jandy Pro Series Backwash Valve with NeverLube® Technology



Jandy Pro Series Slide Backwash Valve



Jandy Pro Series Multi-Port Backwash Valve




Zodiac Pool Systems, Inc.
2620 Commerce Way, Vista, CA 92081
1.800.822.7933 | www.ZodiacPoolSystems.com

Zodiac Pool Systems Canada, Inc.
2115 South Service Road West, Unit #3, Oakville, ON L6L 5W2
1.888.647.4004 | www.ZodiacPoolSystems.ca



JS Series Side Mount Sand Filters

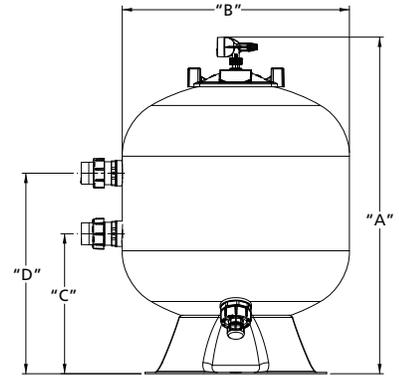

Versatile and Efficient.

The JS Series Side-Mount Sand Filter boasts an extra deep sand bed for improved, superior filtration.

DIMENSIONS

Dimension	JS60-SM	JS100-SM
Height - Dimension "A"	38.25"	44.5"
Width - Dimension "B"	24"	30"
Bottom port height - Dimension "C"	14.4"	18.5"
Top port height - Dimension "D"	22.4"	26.5"

SPECIFICATIONS

Dimension	JS60-SM	JS100-SM
Filtration Area sq ft ²	3.14"	4.9"
Filtration gpm/ft ²	20"	20"
Filter Flow Rate gpm	63	98
Backwash Minimum Flow Rate gpm	47	74
Maximum Working Pressure psi	50	50
Six hour Capacity	22,680	35,280
Normal Start Up Pressure	4-15	6-15

